

CA					
01				160x160x93	14x148
16				160x800x80	150x70
42				120x120x80	111x111
46				120x60x80	115x55
96				96x96x80	91x91
72				72x72x70	68x68
48				48x48x78	45x45
49				96x48x80	92x45
79				79x43x45	76x40
		L			
		C			
		R			
			A		
			V		
			VA		
					AC220V
					DC220V
			DC24V		

CA16L-V 10kv/100V AC220V
 CA49C-A 300A/75mv AC220V

0.5% 2

0000~1999

A kA V kV kW MW kvar Mvar cos HZ m/s Mpa

0-5A AC,DC 75mV 4-20mA

0-5A 0.1 75mv 4-20ma 5

CT 50/5A;100/5A;200/5A;400/5A;800/5A;1000/5A;2.0kA/5A;5.0kA/5A

50A/75mV,75A/75mV,100A/75mV,150A/75mV,200A/75mV,250A/75mV

2 10 /2

0-100V,220V,380V,450V,500V,600V 50HZ

0-10V, 0-150V, 0-300V, 0-450V

1M

PT 6kV/100V;10kV/100V;35kV/100V;66kV/100V;110kV/100V;220kV/100V;500kV/100V

1.2 2 /5

0.5

45-65HZ

0.5

8h

0.5

AC220V 20%

DC220V,DC24V

3VA

-20~60

95%

106kpa

2kV 1min


100M

1MHz 100kHz


2.5kV

1.0kv

50000

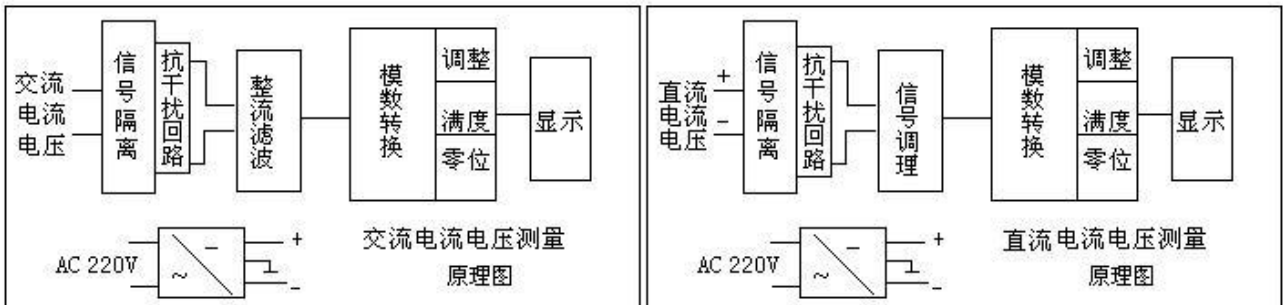



01

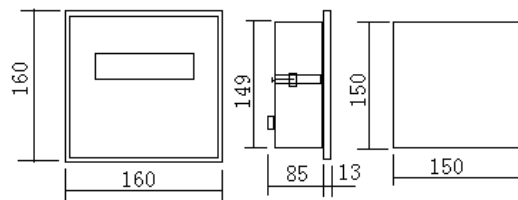


01系列结构图

CA01L-A
CA01C-A


CA01L-V
CA01C-V




16

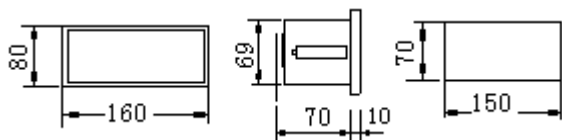



CA16R- CA16L-A CA16C-A CA16L-V CA16C-V

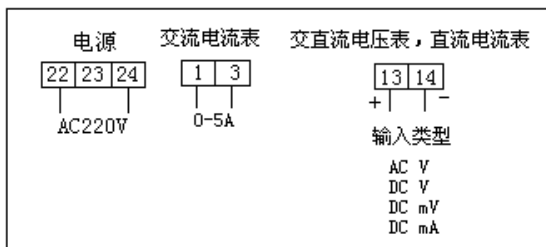


42

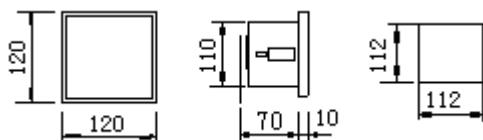


CA42R- CA49C-VA CA42L-A CA42L-V CA42C-A CA42C-V

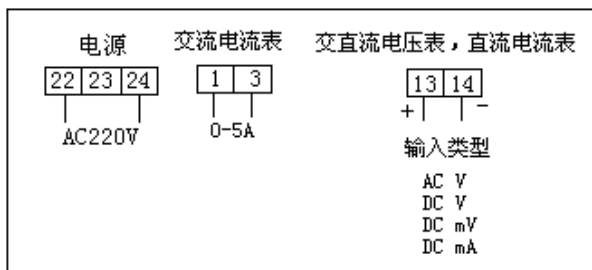


46

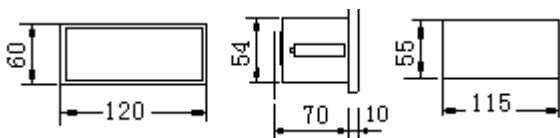


CA46L-A CA46L-V CA46C-A CA46C-V CA46R-

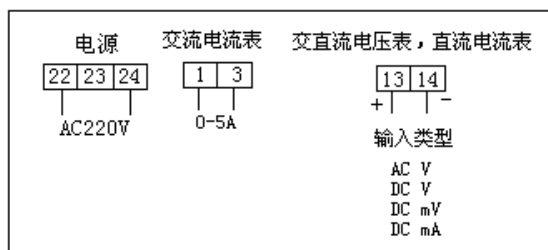


96

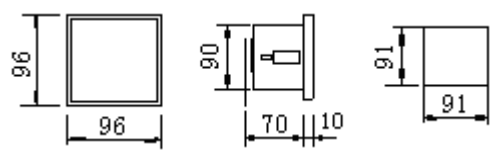


CA96R- CA96L-A CA96L-V
 CA96C-A CA96C-V

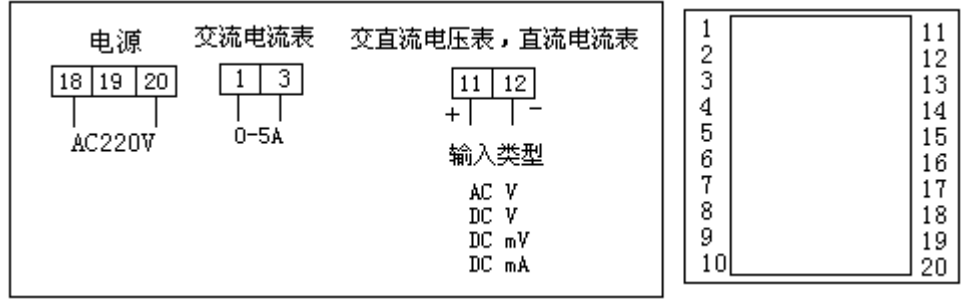


49

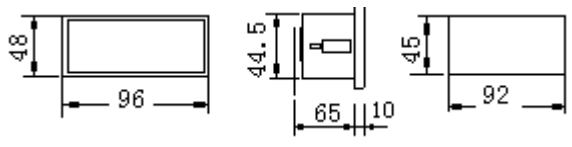


CA49R- CA49C-VA
 CA49L-A CA49L-V
 CA49C-A CA49C-V

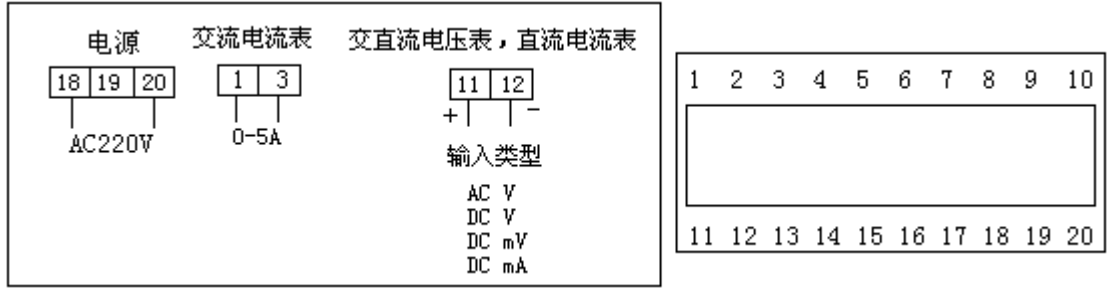


6

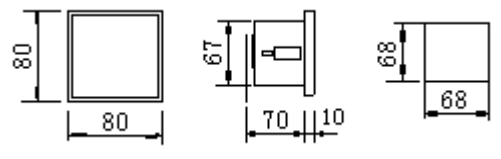

CA6L-A CA6L-V
 CA6C-A CA6C-V
 CA6R-

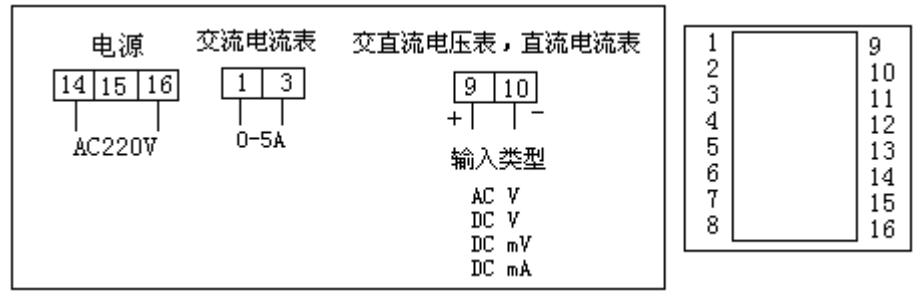

72

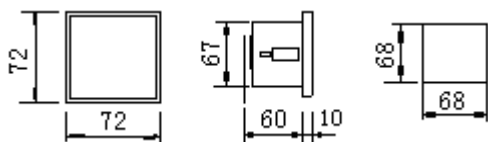


CA72L-A
CA72C-A
CA72R-


CA72L-V
CA72C-V



交流电流表 交直流电压表，直流75mV

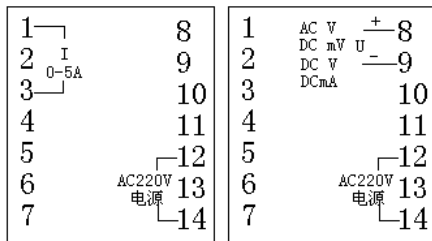

48

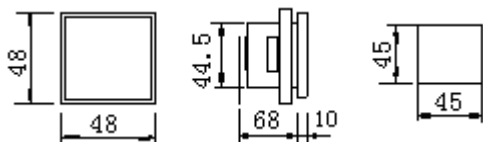


48x48x78

45x45


CA48L-A
CA48C-A
CA48L-HZ

CA48L-V
CA48C-V
CA48R-




类型	端子接入号
供电电源	1、2 接 L N
交流电流表	3、5 接入 I (0-5A)
交流电压表	3、5 接入U 电阻表同电压表
直流电流、电压表	3+, 5- 接入75mv, 4-20mA或直流U

79

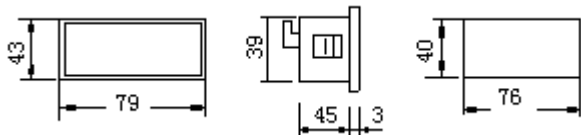


CA79R-
CA79L-A
CA79C-A

CA79L-V
CA79C-V





类型	端子接入号
供电电源	1、2 接 L N 直流电源DC24V 1+, 2-
交流电流表	3, 4 接入 I (0-5A)
交流电压表	3, 4 接入U 电阻表同电压表
直流电流、电压表	3+, 4- 接入75mv, 4-20mA或直流U

DA

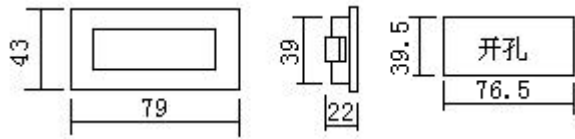

DA-S	DC5V	0-10V	0-1500

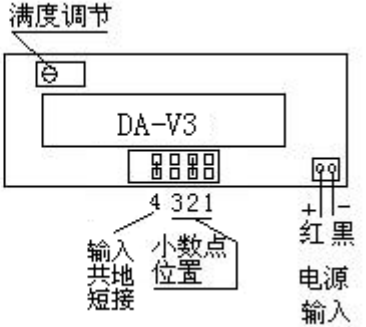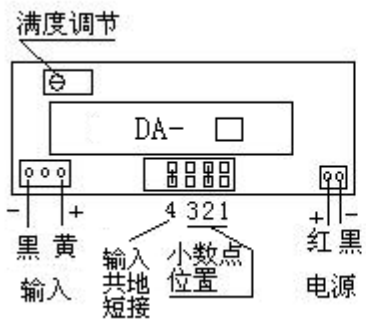

() AC220V